

VICUT



LARGE FORMAT ROLL LAMINATOR

VLR1700

Roll to Roll, Low Temperature Lamination,
Vertical Slitting, Easy to use.

SAMPLES
DISPLAY



PRODUCT PROFILE

VICUT roll-to-roll laminator VLRI 700 with pneumatic lifting system, it is ideal for laminating and mounting application of signage and graphic up to 1690mm/64". It gives the extra feature of a heat assisted top roller. Auto locked exchangeable roll shafts, easy for loading and unloading medias.

OPTIONAL DEVICE

Air compressor



TECHNICAL PARAMETERS

Model	VLR 1700
Applicable Film	PVC film, CPP film, BOPP film
Max Thickness	30mm
Max Speed	9m/min
Heating	Top Heated
Max Temperature	60 Degrees Celsius
Foot Pedal	Single Foot Pedal
Control Panel	Front Control Panel
Up and Down	Pneumatic
Roller	120mm Silicon
Trimmer Holder	2 Single and 1 Double Central Blade
Trimmer Type	Tungsten Steel
Power	1600W
Working voltage	110V/220V 50hz/60hz
Machine Dimension (L*W*H)	2060x1216x652mm
Package Dimension (L*W*H)	2260x800x750mm
N.W./G.W.	140kgs / 180kgs

ACCESSORIES AND TOOLS




Stand Screw 1 bag



Fuse 2 pcs



Terylene Mat 2 pcs



Magnetic Head 6 sets



Wrench 1 set



Trimmer 1 pc




Roll Clip 1 set

WORKSHOP



PACKING




DETAILS DESCRIPTION



Pneumatic up and down

Pneumatic up and down rollers, easier for lifting and pressure adjustment.

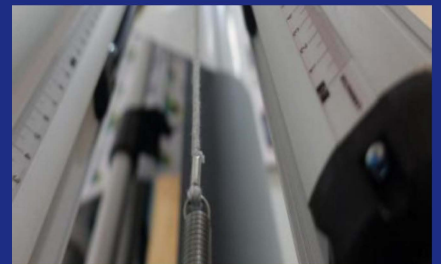

Anti-static string

Anti-static string is efficient way to ease static, upgraded shaft caps and holders can be easily lock and load medias.



Glue-free silicon rollers

High quality glue-free 120mm silicon rollers have more reliability and durability for long time use.



Vertical cutting system

Vertical cutting system can fully adjust to trim the edges. The safety tungsten steel blades can be applied over 15000m with sharp cutting.